

NOTES: UNLESS OTHERWISE SPECIFIED

LTR

DESCRIPTION


REVISIONS

DATE

APPROVED

- CONSTRUCTION:
INSULATOR: P.V.C. AVAILABLE IN BLACK OR RED.
CONTACT: ANACONDA 7021 OR BOILCAT C97.
GOLD PLATED.
SOCKET: BRASS, TIN PLATED.

- PERFORMANCE:
MAXIMUM CURRENT: 15 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

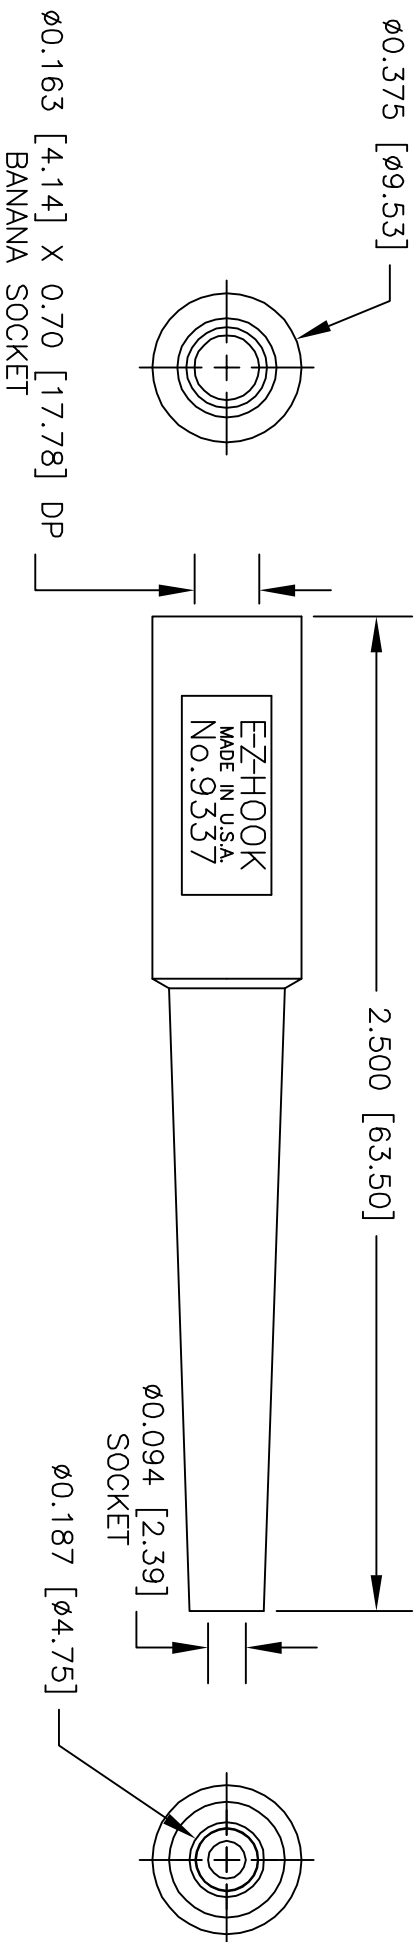

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
		± .XX ± .XXX ±		APPROVALS		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
		MATERIAL SEE NOTE.		DRAWN R.L.		E-Z-FLEX BAN SKT TO 0.094 [2.39] SKT ADAPTER (12AWG)	
		FINISH SEE NOTE.		APPROVED BY		SIZE CODE IDENT NO. DRAWING NO.	
		APPLICATION USED ON				A 08505 9337	
		DO NOT SCALE DRAWING		DATE 3/09		SCALE 2:1	
						SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.