
SPECIFICATION CONTROL DRAWING

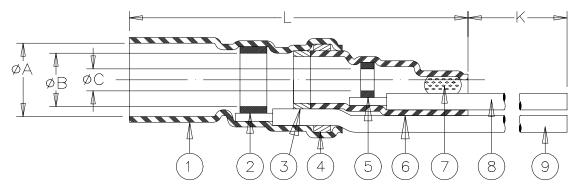

PART	PRODUCT	PRODUCT DIMENSIONS					"GA" = WIRE GAUGE
NAME	REVISION	A	В	C	L	K	(AWG)
		min	min	min	max	min	
B-021-26-N	D	6.3	4.6	2.8	32	150	26
		(0.250)	(0.180)	(0.110)	(1.260)	(5.900)	

CABLE DIMENSIONS							
D	Е	F	(G±0.02)	(M±0.02)			
		min					
2.4 (0.095) TO	2.3 (0.090) TO	0.3	19	6			
6.3 (0.250)	4.6 (0.180)	(0.012)	(0.750)	(0.235)			

MATERIAL

- 1. & 6. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
- 2. & 5. SOLDER PREFORMS WITH FLUX:

SOLDER: TYPE Sn63 per ANSI J-STD-006.


FLUX: TYPE ROL1 per ANSI J-STD-004.

- 3., 4. & 7. MELTABLE RINGS: Thermally stabilized thermoplastic.
- 8. CONDUCTOR LEAD: AWG GA (see table). MIL-W-81822/13-GA-9. ETFE insulated silver plated solid conductor. Color: white.
- 9. GROUND LEAD: MIL-W-81822/13-GA-G. ETFE insulated, silverplated, solid conductor. Color: blue. GA= Gauge per table.

APPLICATION

- A. The parts covered by this SCD are for use in terminating the primary conductor and the braided shield of a coaxial cable having tin or silverplated conductor and shield, rated for at least 125° C and meeting the dimensional requirements listed.
- B. Parts will meet the requirements of Raychem specification RT-1404 when installed per Raychem RPIP-500-03.

For best results, prepare the cable as shown:



*A trademark of Tyco Electronics Corporation.

tyco Electronics	Tyco E 305 Co Menlo	nstituti	Raychem Products)	COAXIAL SOLDERSLEEVE* DEVICE WITH PRE-INSTALLED LEAD SOLID WIRES				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS.					DOCUMENT NO: B-021-GA-N				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ROUGHNESS IN this dievalua		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DATE: 11/23/98		DOC ISSUE:		
DRAWN BY: R. MAPALO			ACES: B021XYN	DCR NUMBER: D981932		Prod. REV. SEE TABLE	SCALE:: NONE	SIZE:	SHEET: 1 of 1